

Technical Disclosure Commons

Defensive Publications Series

May 2022

FIXING OF MUDGUARDS IN MOUNTED CONDITION

Axel Unger

Bertrandt Ingenieurbüro GmbH

Follow this and additional works at: https://www.tdcommons.org/dpubs_series

Recommended Citation

Unger, Axel, "FIXING OF MUDGUARDS IN MOUNTED CONDITION", Technical Disclosure Commons, (May 25, 2022)

https://www.tdcommons.org/dpubs_series/5167




This work is licensed under a [Creative Commons Attribution 4.0 License](https://creativecommons.org/licenses/by/4.0/).

This Article is brought to you for free and open access by Technical Disclosure Commons. It has been accepted for inclusion in Defensive Publications Series by an authorized administrator of Technical Disclosure Commons.

FIXING OF MUDGUARDS IN MOUNTED CONDITION

Initial situation:

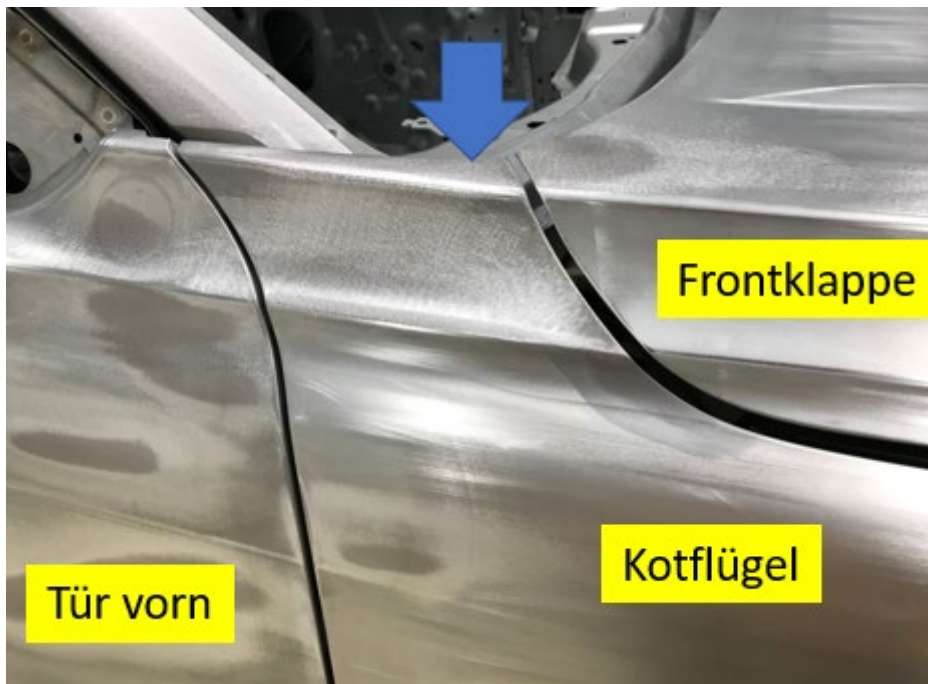

No finish is possible at this point without bending the mudguard.

Disadvantage:

Damage in the individual part will show in the surface after painting.

Solution:

Fixing of the mudguard in the mounted state in the area of post A so that it can be finished there, although it is extremely unstable there. The fixation is done by a fixture to support the wing, which is positioned on the water tank, so that the area can be finished.

Advantage:

Improvement of the surface quality.

Technical implementation:

The device is picked up by both handles, placed in the lower position on the water box and positioned under the mudguard. The ball handle is lifted until the collar comes from the mudguard to the device. Then the handle is released so that the magnet fixes the position of the device. Now the mudguard can be finished without deforming. To release, the jig is picked up by the handle. This releases the magnet and the ball handle can be pushed down. The device is now free and can be removed.

Umsetzungskonzept
der Vorrichtung
F-Zeit optimiert

